



Tosca CR1 1208

Food grade, euro sized pallet



The CR1 is a euro size food grade metal reinforced pallet with high performance making it a multi-use pallet suitable for various applications and industries.

Designed with three runners for easy handling, this pallet features a rimmed upper deck with anti-slip stripes to ensure safe stacking of empty pallets and secure transport of loaded goods. This pallet is ideal for racking and automation.

Design & Features

Euro-size pallet: fit for automated processes

Reusable and 100% recyclable at end of life



Anti-slip top deck for safely stacking



Scan this QR to **discover more** about this product.



Maintain hygiene and product quality

Food-safe, non-porous plastic resists humidity, fungi, acids, fats, solvents, and odours to maintain quality.



Meet PPWR and EPR regulations with reusable, recyclable pallets

Reusable and 100% recyclable at end of use.



Protect products with heavy duty metal reinforcements

Made from food-grade HDPE with heavy duty metal reinforcements for superior durability and performance.



Optimise efficiency with automation-ready design


Euro-size consistency and three-runner base ensures zero disruption in automated systems.



Adapt to any industry or internal logistics need

Versatile design supports a wide range of sectors and logistics applications.

Specifications

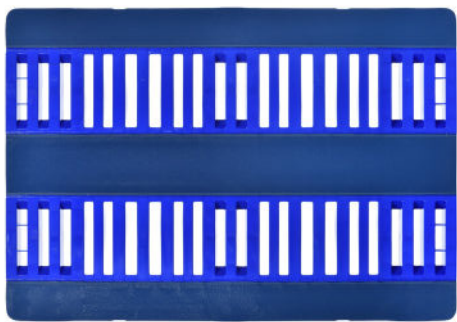

| Characteristics | |
|-------------------|-------------|
| Colour | Blue |
| Runners | 3 |
| Rims | No |
| Anti-slip | Yes |
| Metal re-inforced | Yes |
| Material | HDPE |
| Foodgrade | Yes |
| ISPM-15 proof | Yes |
| Temperature range | -20°C/+40°C |

| Dimensions | |
|------------|---------------------|
| External | 1200 x 800 x 160 mm |
| Weight | 19 kg * |


*Weight may vary by 10%

| Load capacity | |
|--------------------|----------|
| Max static load | 7.500 kg |
| Max dynamic load | 1.750 kg |
| Max in rack load * | 1.750 kg |

*with evenly spread loads

| Loading quantities | |
|--------------------|-----------|
| Units per trailer | 495 units |
| Stack | 15 units |

Technical Drawing

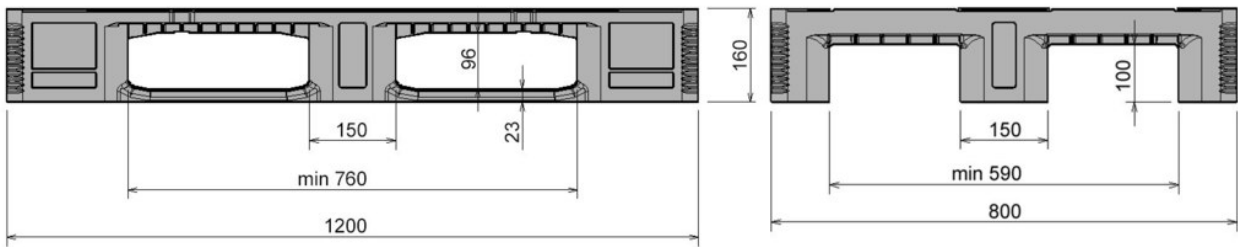

Disclaimer

- Temperature ranges, dimensions, weights, volumes and loading capacities listed are estimates and may vary due to handling, manufacturing tolerances, and regulatory differences. Any deviation from the specified temperature range must be confirmed with Tosca.
- Users must assess product suitability and conduct appropriate risk assessments before use.
- All users must follow Tosca's specifications and Health & Safety Guidelines and use outside these parameters is at the user's risk.