



Tosca CP 1208

The circular euro- sized pallet



The **Tosca CP 1208** is engineered for seamless integration and high-performance supply chains. Its standard industry size ensures automation compatibility, while a secure, optimised design supports stable stacking and safer transport.

Lightweight and ergonomic, it improves handling and operator safety. Made from 100% recycled plastic, it is durable, repairable and designed to lower total cost of ownership.

Non-porous and easy to clean, it supports high hygiene standards and reduces contamination risk. Fully compliant with PPWR and EPR, with integrated RFID for asset tracking, it delivers complete visibility and control across the supply chain.

Design & Features

Deck grooves and interlocking features secure RPCs for stable, safer stacking and transport.

Integrated anti-slip system for increased stability.

Well positioned top-deck handles for safer and easier handling.



Integrated drainage holes for increased hygiene and reduced shrinkage.

Chamfered skid edges for easier and smoother handling with forklifts.

RFID tags and clear logo visibility for easy asset tracking.



Integrate seamlessly with your supply chain

Standard industry sized and automation-ready design for easy integration with operations.



Optimise operations for safer handling and transport

Stable stacking, anti-slip features and lighter, ergonomic design reduce strain and enhance operational safety.



Protect products and reduce costs

Durable, repairable construction extends lifespan and reduces product damage.



Maintain the highest hygiene standards



Non-porous, splinter-free plastic with integrated drainage resists moisture and supports contamination-free operations.



Comply with PPWR and EPR

100% recycled content, reusable and recyclable - meeting evolving packaging regulations.

Specifications

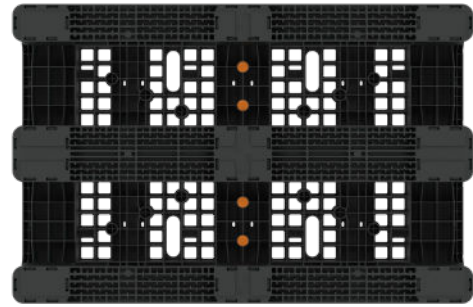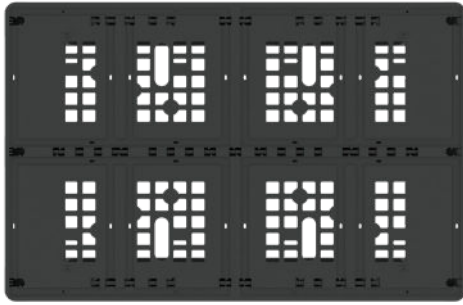

Characteristics

Colour	Dark Grey
Runners	3
Rims	No
Anti-slip	Yes
Metal re-inforced	Yes
Material	Recycled plastics
Foodgrade	No
ISPM-15 proof*	Plastic pallets do not require ISPM-15 compliance
Temperature range	-10°C/+40°C*

*Plastic pallets do not require ISPM-15 compliance, unlike wooden pallets which must be heat treated or fumigated.



Dimensions

External	1200 x 800 x 150 mm
Weight	21 kg



Load capacity

Max static load	3.000 kg
Max dynamic load	1.500 kg
Max in rack load *	1.000 kg



*with evenly spread loads



Loading quantities

Units per trailer	528 units
Stack	16 units

Technical Drawing

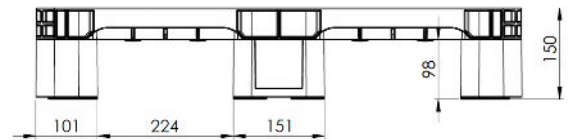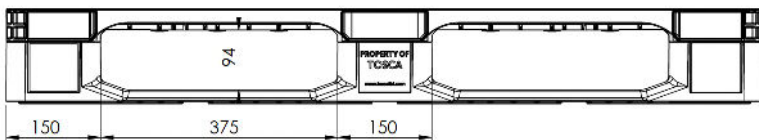

Disclaimer

- Temperature ranges, dimensions, weights, volumes and loading capacities listed are estimates and may vary due to handling, manufacturing tolerances, and regulatory differences. Any deviation from the specified temperature range must be confirmed with Tosca.
- Users must assess product suitability and conduct appropriate risk assessments before use.
- All users must follow Tosca's specifications and Health & Safety Guidelines and use outside these parameters is at the user's risk.
- Circular pallet has been tested according to ISO 8611 methodology.